

WR30X B1

AX3000 Wi-Fi 6 Router



Experience the future of connectivity with our advanced WR30X B1 Wi-Fi 6 Router. Unleash blazing speeds up to 3000Mbps with 1024-QAM and quad-core processing power. Four high-gain antennas deliver whole-home coverage with zero dead zones. Enjoy enterprise-grade security with WPA3 encryption, parental controls, and seamless VPN support. Perfect for 4K streaming, gaming, and smart homes. With easy app management and future-proof Wi-Fi 6 technology, stay connected faster and smarter!

Features

Blazing-Fast Dual-Band Wi-Fi 6 Speed

Experience high-speed dual-band speeds up to 3000Mbps(2.4GHz and 5GHz) with advanced 1024-QAM and EHT160 support. Perfect for 4K streaming, VR gaming, and large file transfers without lag.

Powerful Quad-Core Performance

Equipped with a 1.7GHz quad-core processor and 256MB DDR3L RAM, this router ensures smooth multitasking and stable connections for dozens of devices simultaneously.

Enhanced Coverage with High-Gain Antennas

Four external 5dBi antennas optimize signal strength and reduce dead zones. Enjoy reliable coverage throughout your home or office with minimized interference.

Advanced Security & Parental Controls

WPA3 encryption, SPI firewall, and URL filtering keep your network safe. Easily manage access and monitor usage via the intuitive mobile app or web interface.

Flexible Networking & VPN Support

Dual-stack IPv4/IPv6, IPSEC/PPTP/L2TP VPN, and IGMP proxy for IPTV. Ideal for remote work, gaming, and media streaming with enterprise-grade features.

WR30X B1

AX3000 Wi-Fi 6 Router

Hardware Parameters		
Chipset	BCM6756	
CPU Frequency	Quad-core 1.7GHz	
Memory	256MB 16-bit DDR3L	
Flash	128MB NAND Flash	
Device Interfaces	• 1 x 10/100/1000M RJ45 WAN Ethernet • 3 x 10/100/1000M RJ45 LAN Ethernet • 1 x WPS Button • 1 x Reset Button • 1 x Power Jack	
WIFI	• 2T2R 2.4GHz 802.11b/g/n/ac/ax, 574Mbps • 2T2R 5.8GHz 802.11a/n/ac/ax, 2402Mbps	
WIFI Antenna	• 2 x 5dBi external 2.4G antenna • 2 x 5dBi external 5G antenna	
WIFI Features		
Standard	• 802.11a/b/g/n/ac/ax • 2.4G: 2.4~2.4835GHz 5G: 5.150~5.825GHZ • Korea, Japan, ETSI, FCC channels can be selected	
Modulation Schemes	• OFDM = BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM • DSSS = DBPSK, DQPSK, CCK	
Transfer Rate	• HE20: up to 574Mbps 2.4G+5G • HE40: up to 1147Mbps 2.4G+5G • HE80: up to 1201Mbps 5G • HE160 up to 2402Mbps 5G	
Software Features		
Wireless	Wireless spec Features: • Embedded AP with 8 SSID on each Radio • Separate authentication for each SSID • Wmm • AutoChannel • BSD • easyMesh • WPA3/SAE Security	Wireless main Protocols: • IEEE 802.11a • IEEE 802.11b • IEEE 802.11g • IEEE 802.11n • IEEE 802.11ac • IEEE 802.11ax • IEEE 802.11h(dfs) • IEEE 802.11e(wmm) • IEEE 802.11k/v/r

WR30X B1

AX3000 Wi-Fi 6 Router

Software Features

Network	Network Features: • IPv4/IPv6 dual stack • IPv6 Stateless/Stateful • 6RD • Static/IPoE/PPPoE Connection Type • IPoE Bridge Mode • IPoE DHCP/Static Mode • PPPoE Dynamic/Static • IGMP proxy and MLD for IPTV • PPTP, L2TP GRE IPSEC VPN • NAT, NAT and ALG • DHCP Server • Static route	Network main Protocols: • RFC0768 UDP • RFC0791 IP • RFC0792 ICMP • RFC0793 TCP • RFC0826 Ethernet ARP • RFC0894 IP over Ethernet • RFC0922 Broadcasting Internet Datagrams • RFC0950 Internet Standard Subnetting • IEEE802.3 Ethertype • IEEE802.1p • RFC2516 PPP Over Ethernet (PPPoE) • RFC1662 PPP in HDLC-like Framing • RFC1332 PPP Internet Protocol Control Protocol • RFC1042 Transmission of IP Datagrams over IEEE 802 Networks • IPoE (a.k.a IP over Ethernet over AAL5)
Other Features	• QoS Flow Control • DMZ and Port forwarding(Virtual server) • SPI Firewall, Denial of Service (DoS) protection • IP/Port/MAC filtering and URL filter • DDNS • SNTP Date/time update from Internet Time Server • Diagnostics(Ping/TraceRoute) • Logs and statistics • Automatic timing restart	
Management Features	• WEB GUI • APP • FOTA • Command Line Tools(telnet/ssh) • TR-069 Remote Mangagment • TR181/TR104/TR140/TR143/TR157(periodicstatistics) • UPNP	

WR30X B1

AX3000 Wi-Fi 6 Router


Physical

Dimensions	227.8 x 150 x 30.5mm
Weight	318.5grams (0.702pounds)
Temperature	• Operating: 0°C~40°C • Storage: -20°C ~ 70°C
Operating Humidity	5%~95% (typical)
Power Supply	12V/1A
Regulation Compliance	CE
Safety Regulations	UL
Green Standard	RoHS

WR30X B1

AX3000 Wi-Fi 6 Router

Dimension Diagram

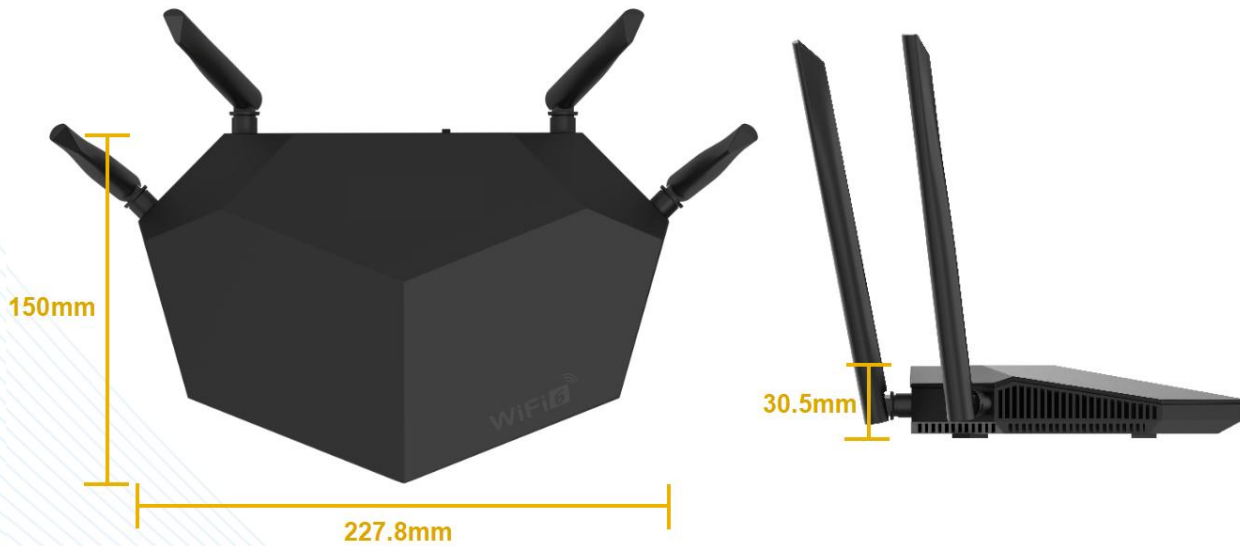

Interfaces Diagram

